



USINAGEM LATERAL (A/B)

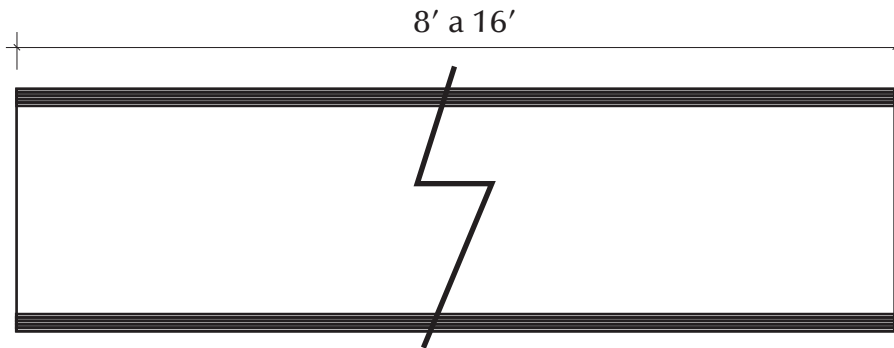

USINAGEM TOPO (C/D)

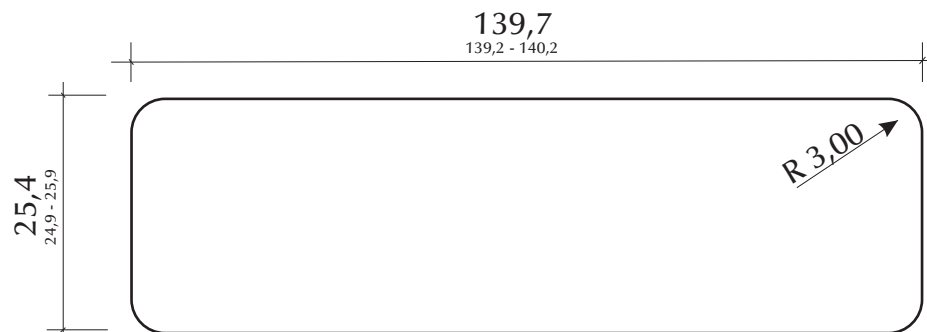

CDT - CONTROLE DE DOCUMENTOS TÉCNICOS

Produto: Deck Classic 6- USA -139,7 x 25,40mm

Cód. Produto: dck_cls_13970A_2540

Arquivo Digital: dt_eng_dck_cls_13970a_2540_v_2010_01

Versão: dck_cls_13970A_2540_v_2010_01


Catálogo: tec_deck_clasic_pt_2010.pdf

Dimensional Reading / mm

55,80 → Nominal dimension
(55,00 - 56,60) → Tolerance

· Drawings are scaleless / All measurements are in millimeters
· Dimensions may change according to internal quality procedures.

Viewer



Product: Deck Classic 6- USA - 139,70 x 25,40mm

Code: dck_cls_13970A_2540

Thickness: 25,4mm

Width: 139,7mm

Length: 8' a 16'

Variation: 4',5',6',7'

Version: dck_cls_13970A_2540_v_2010_01

·Product available in the following types

- **Cumaru** (*Dipteryx sp*)
- **Garapeira** (*Apuleia sp*)
- **Ipê** (*Tabebuia sp*)
- **Tatajuba** (*Bagassa guianensis*)
- **Sucupira preta** (*Bowdichia sp*)
- **Maçaranduba** (*Manilkara sp*)

·Shipment Composition: Container DRY - 20"

- **Cumaru** (*Dipteryx sp*)- 22,00m³
- **Ipê** (*Tabebuia sp*)- 20,00m³

Drying:

KD> Dry in a 16-16 % drying stove

Weight / KD

- **Cumaru** (*Dipteryx sp*)- 1.250Kg/m³ [(+10%) ou (-10%)]
- **Ipê** (*Tabebuia sp*) - 1.300Kg/m³ [(+10%) ou (-10%)]

Milling

· Decking suitable for external use with grooved finish cut on the top and bottom side, and with smooth finish and four round corners of a 3.00-mm radius. S4S e E4E.

Pallet Stacking

Steel taped. Stacks of specific length and width. Stacked with separators and waxed on top